

A3 UV DTF

A3 UV DTF Printer




PRINT SPEED
0.28m²/h~3m²/h

FUNCTIONS AND FEATURES

HIGH-QUALITY PRINTING

Epson I3200(8)-U1 printhead, 1200DPI, high resolution, perfect quality output.




HIGH QUALITY OUTPUT

Support printing W+C+V, printing speed is faster and ensure high quality output.



SILENT INK CHAIN

Silent Ink Chain, lower noise during working, making carriage more stability.



INTELLIGENT INK SUPPLY

New ink tank design, which added ink auto circulation function and lack ink alarm function.




HIGH-DEFINITION TOUCH SCREEN DESIGN

High-Definition Touch Screen, more good operating experience and reduce mistakenly touching.




HIGH PRECISION UP AND DOWN PLATFORM

High Precision Cellular Hard Aluminum Platform, and the platform accuracy controlled within 0.1mm.




SUPPORT MORE PRINTING SOLUTION

Multiple function design, which support 4 applications. For example: Flated, Cylinder, RTR and UV DTF.



LINEAR SILENT GUIDE RAIL & VISION POSITIONING

Linear silent guide rail, let carriage move more stable, lower noise. Vision Positioning function, reduce layout time and directly printing small and irregular goods.

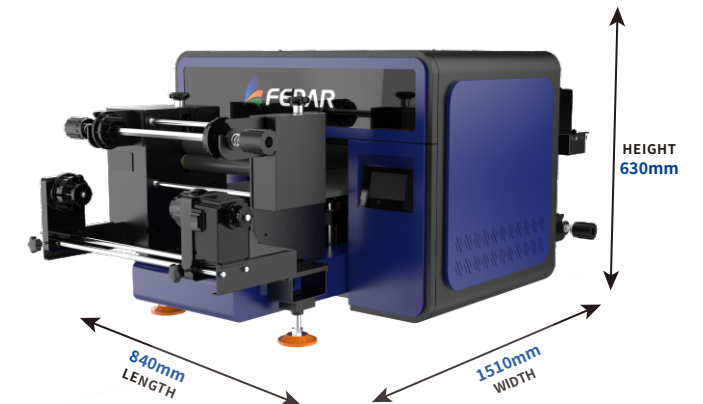

TECHNICAL PARAMETERS

Model	UV-A3	
Printhead Type	EPSON I3200(8)-U1 HD Printhead	
Printhead Quantity	1	
Printhead Cleaning	Automatic Cleaning, Automatic Flash Spray Moisturizing Function	
Print Width	Flatbed: 420mm*297mm (L*W) RTR: 150mm*290mm (Diameter*W) Cylinder: 30-90mm*230mm (Diameter*W)	
Ink Type	LED-UV Curing Ink	
Color	Standard: C M Y K+W+V Optional: Y M C K Lc Lm+W	
Print Speed	0.28m ² /h~3m ² /h	
Printing Media	Ultra-clear PET Film, Back lit film, PET, Transparent film, Canvas, Velvet Cloth, etc.	
RIP Software	Maintop, FlexiPRINT, Riin, etc.	
Image Format	JPG, TIF, BMP, PDF, etc.	
Computer Configuration	Operating System: Win7 and above GPU: ATI Mobility Radeon Transmission Interface: Giga-bit Ethernet Port CPU: Intel Core i7 3.0HZ above Hard Disk: 500G or more RAM: 8G DDR4 or above	
Print Media Thickness	1mm~98mm	
Working Environment	Temperature: 15°C-30°C Humidity: 35%-65%	
Power Supply	50/60HZ, Input Voltage: 110V/220V Machine Printing Power: 500W	
Machine Size	Dimension: 840*1510*630mm Packing: 1010*1695*765mm A3 UV RTR Assembly: 775*620*520mm Packing: 840*700*660mm	
Weight	Net Weight: 200KG Gross Weight: 220KG A3 UV RTR Assembly Net Weight: 58KG Gross Weight: 76KG	

*The technical indicators and content of the machines are subject to the actual sales of the machine. The technical parameters and content of this brochure will be changed without further notice. The right of interpretation belongs to the manufacturer.