


PRINT YOUR DESIGN TRANSFER YOUR IDEA

FD70

| Top Grade Digital DTF Printer |

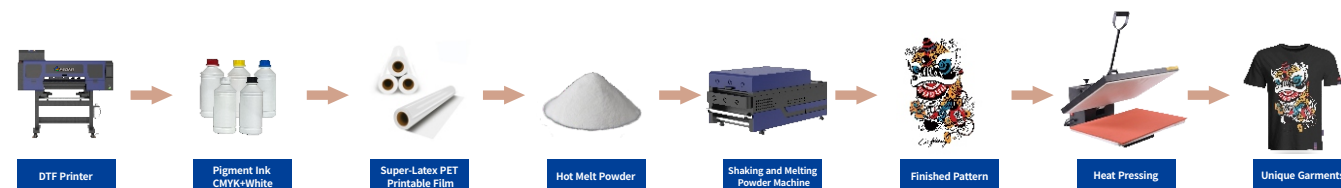

TECHNICAL PARAMETERS

Model	FD70-4(four-head)	FD70-5(five-head)	FD70-6(six-head)
Printhead	Type: EPSON I3200-A1 Quantity: 4	Type: EPSON I3200-A1 Quantity: 5	Type: EPSON I3200-A1 Quantity: 6
Print Width	600mm		
Print Speed <small>(Tested on linear printing without feather function)</small>	4PASS: 22㎡/h 6PASS: 14㎡/h 8PASS: 10㎡/h	6PASS: 24㎡/h 9PASS: 18㎡/h	
Ink Type	Pigment Ink		
Print Color	CMYK+W		
RIP Software	Maintop, FlexiPRINT		
Transmit Port	Gigabit Ethernet	USB3.0	USB3.0
Print Media	PET Film		
Image Format	JPG, TIF, PDF, etc.		
Computer Configuration	Computer System: WIN7 or above, Hard Disk: 500G or more, GPU: ATI Discrete GPU, RAM: 8G or more, CPU: Intel i7 Processor		
Working Environment	Temp.: 15℃ ~ 30℃, Humidity: 35% ~ 65%		
Power	110V/220V, 50HZ/60HZ		
Machine Size	Dimension: 1710*800*1615mm, Packing: 2060*990*940mm		
Weight	N.W: 177kg, G.W: 222.7kg		

*The technical indicators and content of the machines are subject to the actual sales of the machine. The technical parameters and content of this brochure will be changed without further notice. The right of interpretation belongs to the manufacturer.

FEATURES AND ADVANTAGES



Auto Feeding System

Auto feeding material system which will ensure feeding material accurately and improve printing resolution.



LeadShine Motor

High-resolution driver linear encoder, higher resolution, fewer errors in length, more stable resolution.



Epson I3200 Printhead

Equipped with Epson I3200 printheads, using the latest Precision-core technology, high resolution, and high printing speed, bring you the perfect graphic output.



Import Fluororubber Pinch Rollers

Reduce static and ink misting, ensure printing quality, and reject the outputs of media wrinkles.



CMYK +W Ink Printing

Original ink, printing bright, high degree of color reduction.



Silent Linear Guide Rail

Smoother operation and longer life.



Intelligent Voltage Indicator

Machine with voltage indicator which can show input voltage any time. Support 220V and 110V transfer in any time.



Adopt Anti-collision Function

Adopt Anti-collision system which will protect the printhead when material wrinkle.